



# LUFFING TYPE TOWER CRANE D160

## 外形尺寸 Dimensions

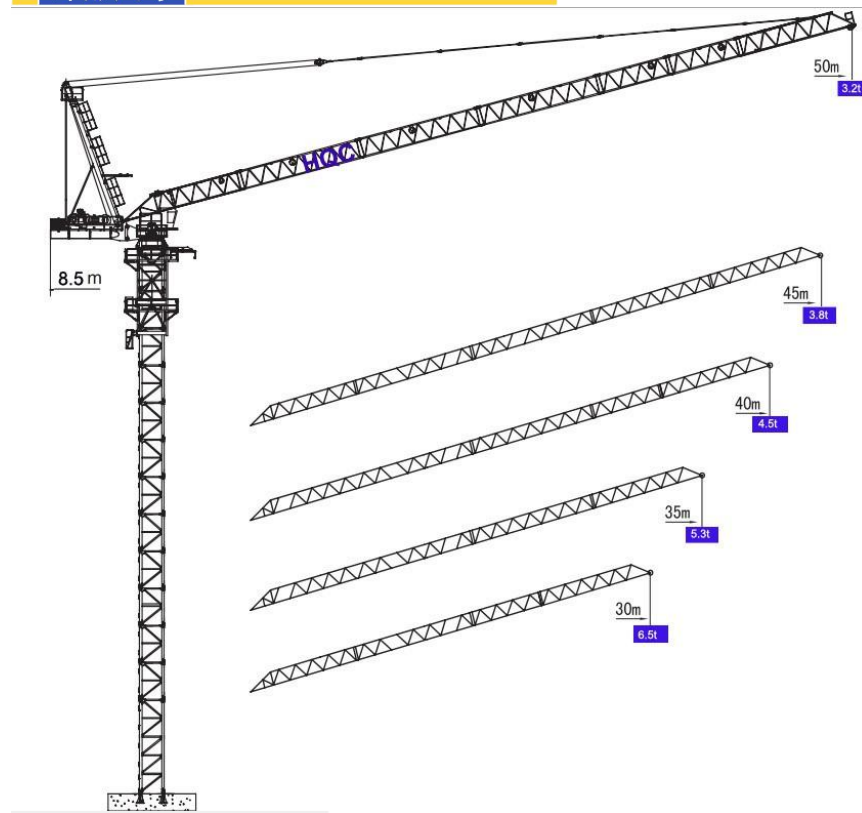


## 附着 Anchorages

### 技术状态 Status

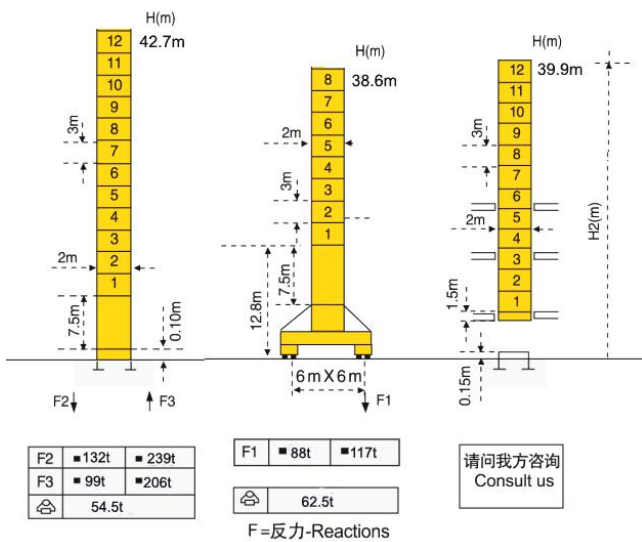



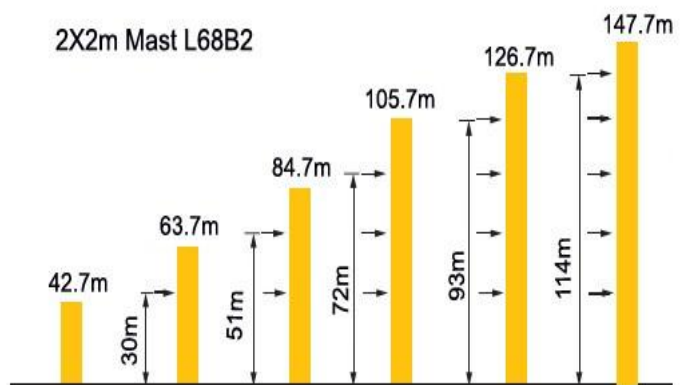







请问我方咨询  
Consult us











\* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

## 起重特性 Load Diagrams

起重臂长 Jib length	$R_{min}$	$R(C_{max})$	$C_{max}$	15	20	25	30	35	40	45	50	
50m		3.5m	20m	5000	5000				5000	4300	3700	3200
		3.5m	20m	10000	10000	10000	7500	6000	5000	4100	3500	3000
45m		3.5m	20m	5000	5000				5000	4400	3800	
		3.5m	20m	10000	10000	10000	7700	6200	5100	4200	3600	
40m		3.5m	20m	5000	5000				5000	4500		
		3.5m	20m	10000	10000	10000	7700	6200	5100	4300		
35m		3.5m	20m	5000	5000				5000			
		3.5m	20m	10000	10000	10000	8000	6400	5300			
30m		3.5m	20m	5000	5000							
		3.5m	20m	10000	10000	10000	8100	6500				

## 传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率 Power
起升 Hoisting		60LVF25	 0~45	5	550 >550*	45 kW
			 45~90	2.5		
			 0~22.5	10		
			 22.5~45	5		
变幅 Luffing		50DVF40	3.5 min			37 kW
回转 Slewing		RCV185X2	0.7 r/min			2×185 Nm
行走 Travelling		18TVF	0~25			4×3.4 kW
电源 Main supply				380V/50Hz ; 440V/60Hz		
总功率 Gross power				90 kW		

## 配重配置 Ballast

Counter-jib ballast		 4200 (kg)	 2100 (kg)		
		PZ4200	PZ2100	 (kg)	
50m	8.5m	2	2	12600	
45m	8.5m	2	1	10500	
40m	8.5m	2	0	8400	
35m	8.5m	1	1	6300	
30m	8.5m	1	0	4200	