



HAMMER HEAD TYPE TOPLESS TOWER CRANE XGT8033-25




外形尺寸 Dimensions

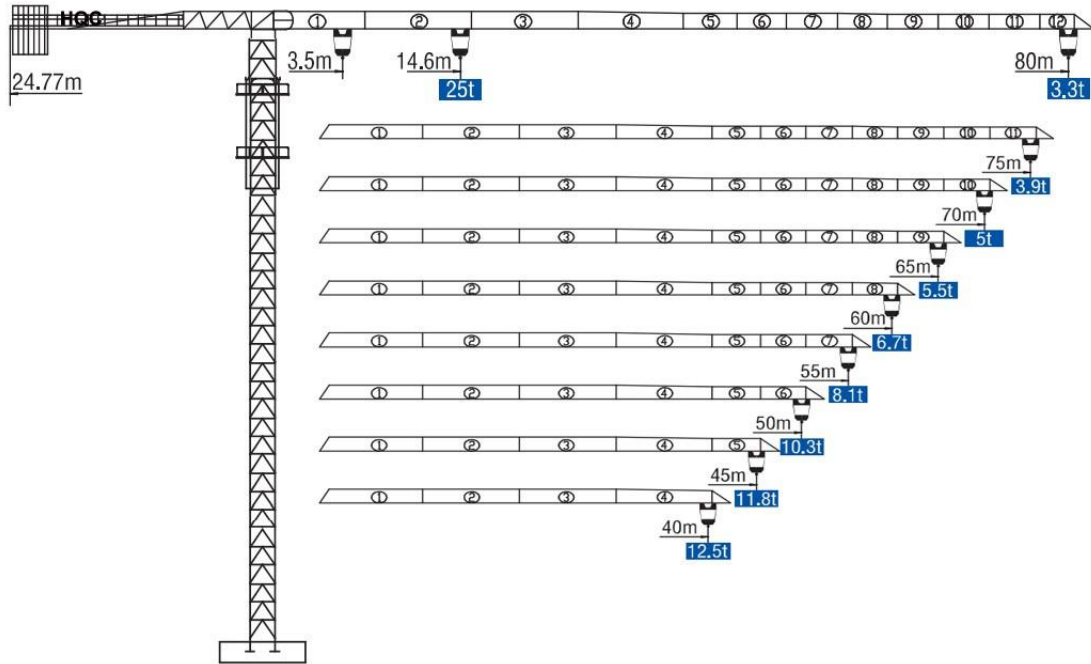

技术状态 Status

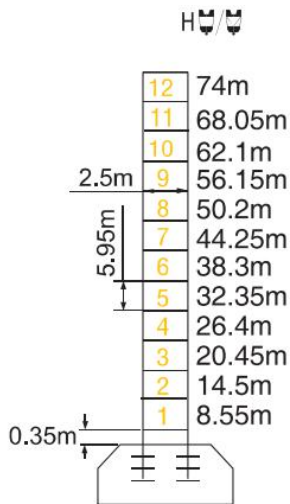

附着 Anchorages

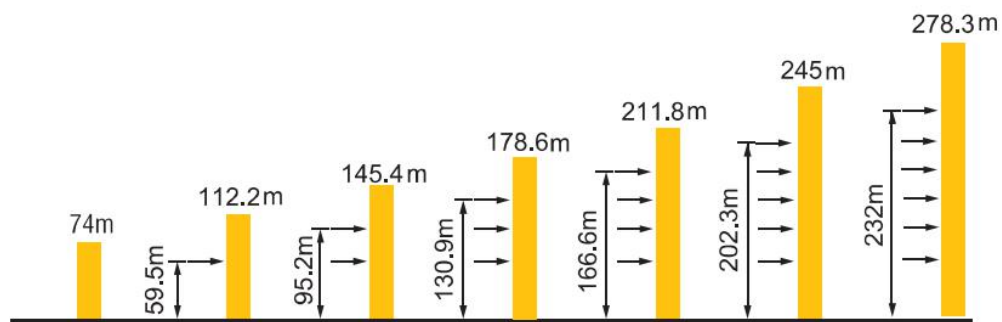

* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

● 工作状态 In service ■ 非工作状态 Out of service

⚠ 不含平衡重最大臂长最大工作高度时的自重

Without load and ballast with longest jib and maximum height

起重特性 Load Diagrams

起重臂 (m) jib		R _{min}	R (C _{max})	C _{max}	幅度 (m) Range										
					20	30	40	45	50	55	60	65	70	75	80
80m		3.5	27.9	12.5t	12500	11500	8200	7100	6260	5500	4900	4400	4000	3600	3300
		3.5	14.6	25t	17875	11200	7900	6800	5960	5200	4600	4100	3700	3300	3000
75m		3.5	29.3	12.5t	12500	12200	8700	7500	6600	5900	5280	4750	4200	3900	
		3.5	15.4	25t	18754	11900	8400	7200	6300	5600	4980	4450	3900	3600	
70m		3.5	32.8	12.5t	12500		9900	8670	7650	6800	6100	5500	5000		
		3.5	17.2	25t	21015	13483	9600	8370	7350	6500	5800	5200	4700		
65m		3.5	32.8	12.5t	12500		9930	8700	7680	6830	6130	5500			
		3.5	17.2	25t	20895	13501	9630	8400	7380	6530	5830	5200			
60m		3.5	35.3	12.5t	12500		10870	9480	8300	7450	6700				
		3.5	18.5	25t	22536	14513	10570	9180	8000	7150	6400				
55m		3.5	37.8	12.5t	12500		11750	10200	9000	8100					
		3.5	19.8	25t	24131	15593	11450	9900	8700	7800					
50m		3.5	41.38	12.5t	12500			11334	10300						
		3.5	21.96	25t	25000	17673	13360	11034	10000						
45m		3.5	40	12.5t	12500			11800							
		3.5	22.2	25t	25000	17704	12000	11500							
40m		3.5	40	12.5t	12500										
		3.5	22.45	25t	25000	18000	13000								

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	绳容量 (m) Rope Capacity	功率 Power
起升 Hoisting		90LVF65	0~35	12.5	650m >650m*	90kW
				35~70		
			0~17.5	25		
				17.5~35		
变幅 Trolleying		15DVF	0~60m/min		15kW	
回转 Slewing		RCV435	0~0.6r/min		3×145N.m	
行走 Travelling		RT643	15/30m/min		4×3.6/5.2kW	
电源 Main supply					440V/60Hz ; 380V/50Hz	
总功率 (不含顶升和行走) Gross power (excluding top-lifting and travelling)					127.5kW	

配重配置 Ballast

Counter-jib ballast		4900 (kg) / 3900 (kg) / 2000 (kg)			
			PZ4900	PZ3900	PZ2000
80m	24.77m	28400	5	1	0
75m	24.77m	28400	5	1	0
70m	24.77m	27400	4	2	0
65m	24.77m	25500	4	1	1
60m	24.77m	24500	3	2	1
55m	24.77m	23500	4	1	0
50m	24.77m	22500	3	2	0
45m	20.74m	28400	5	1	0
40m	20.74m	24500	5	0	0