



SUPER HEAVY TYPE TOPLESS TOWER CRANE XGTT1200

外形尺寸 Dimensions

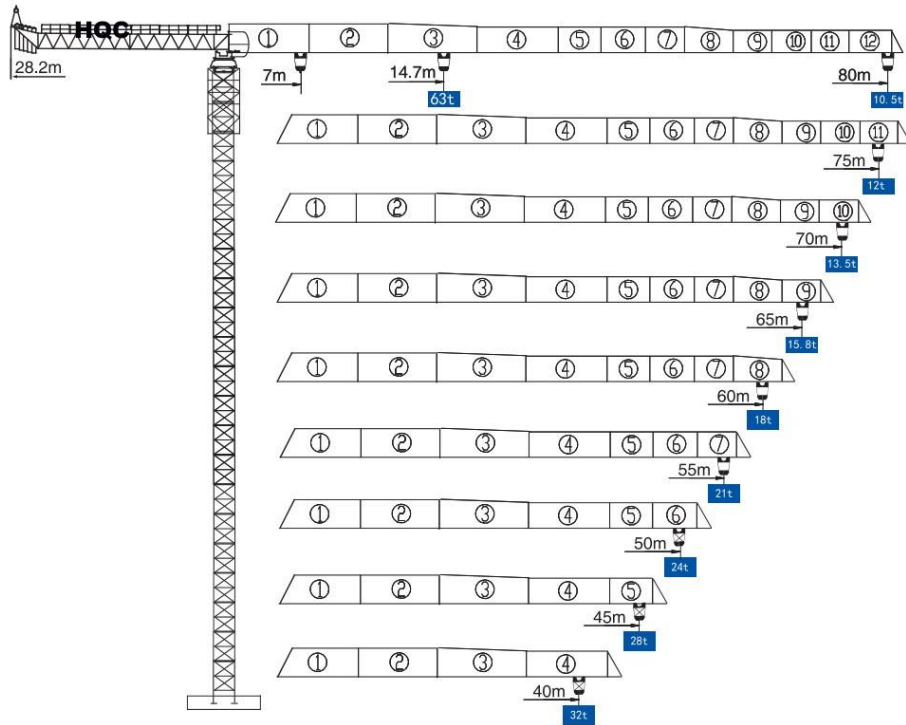


技术状态 Status

配重配置 Ballast

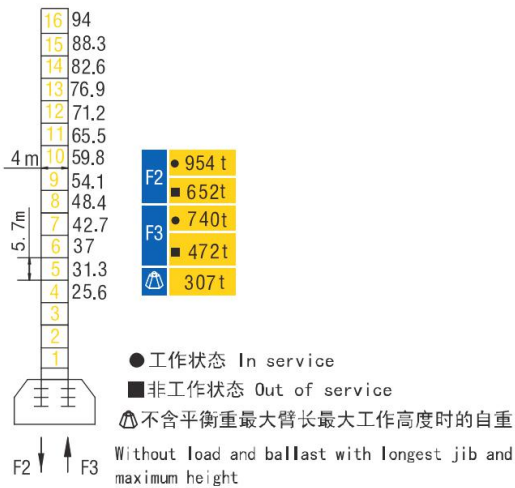

| Counter-jib ballast | | 9625(kg) / 5000(kg) / 2000(kg) | | | |
|---------------------|-------|--------------------------------|---------|---------|---------|
| | | (kg) | PZ 9625 | PZ 5000 | PZ 2000 |
| 80m | 28.2m | 47500 | 4 | 1 | 2 |
| 75m | 28.2m | 47500 | 4 | 1 | 2 |
| 70m | 28.2m | 45500 | 4 | 1 | 1 |
| 65m | 28.2m | 45500 | 4 | 1 | 1 |
| 60m | 28.2m | 43500 | 4 | 1 | 0 |
| 55m | 28.2m | 38500 | 4 | 0 | 0 |
| 50m | 28.2m | 38500 | 4 | 0 | 0 |
| 45m | 23.2m | 53500 | 4 | 3 | 0 |
| 40m | 23.2m | 47500 | 4 | 1 | 2 |

附着 Anchorages

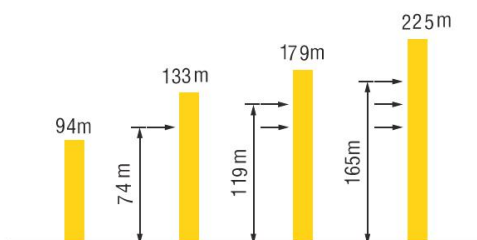

起重特性 Load Diagrams

| 起重臂 (m) jib | R _{min} | R (C _{max}) | C _{max} | 幅度 (m) Range | | | | | | | | | | | | | | | | |
|----------------|------------------|-----------------------|------------------|--------------|------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| | | | | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | | |
| 80m | | 7 | 43.4 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 21.9 | 42t | 42000 | | | | 36500 | 29800 | 25000 | 21500 | 18700 | 16500 | 14600 | 13100 | 11800 | 10700 | 9800 | 9000 |
| | | 7 | 14.7 | 63t | 63000 | 61600 | 45000 | 35000 | 28300 | 23500 | 20000 | 17200 | 15000 | 13100 | 11600 | 10300 | 9200 | 8300 | 7500 | |
| 75m | | 7 | 45.6 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 2.3 | 42t | 42000 | | | | 38500 | 31500 | 26500 | 22700 | 19800 | 17500 | 15500 | 14000 | 12600 | 11500 | 10500 | |
| | | 7 | 15.4 | 63t | 63000 | 47500 | 37000 | 30000 | 25000 | 21200 | 18300 | 16000 | 14000 | 12500 | 11100 | 10000 | 9000 | | | |
| 70m | | 7 | 47.1 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 23.8 | 42t | 42000 | | | | 39900 | 32600 | 27500 | 23600 | 20600 | 18200 | 16200 | 14500 | 13100 | 12000 | | |
| | | 7 | 15.9 | 63t | 63000 | 49200 | 38400 | 31100 | 26000 | 22100 | 19100 | 16700 | 14700 | 13000 | 11600 | 10500 | | | | |
| 65m | | 7 | 50.3 | 21t | 132LVF115B 21000 | | | | | | | | | | | | | | | |
| | | 7 | 25.4 | 42t | 42000 | | | | 35000 | 29500 | 25400 | 22200 | 19600 | 17500 | 15700 | 14300 | | | | |
| | | 7 | 17 | 63t | 63000 | 52800 | 41200 | 33500 | 28000 | 23900 | 20700 | 18100 | 16000 | 14200 | 12800 | | | | | |
| 60m | | 7 | 52.1 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 26.3 | 42t | 42000 | | | | 36500 | 30700 | 26500 | 23100 | 20500 | 18300 | 16500 | | | | | |
| | | 7 | 17.6 | 63t | 63000 | 55000 | 43000 | 35000 | 29200 | 25000 | 21600 | 19000 | 16800 | 15000 | | | | | | |
| 55m | | 7 | 55 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 27.8 | 42t | 42000 | | | | 38600 | 32600 | 28100 | 24600 | 21800 | 19500 | | | | | | |
| | | 7 | 18.6 | 63t | 63000 | 58200 | 45600 | 37100 | 31100 | 26600 | 23100 | 20300 | 18000 | | | | | | | |
| 50m | | 7 | 50 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 30.2 | 42t | 42000 | | | | 35700 | 30800 | 27000 | 24000 | | | | | | | | |
| | | 7 | 20.2 | 63t | 63000 | 50000 | 40800 | 34200 | 29300 | 25500 | 22500 | | | | | | | | | |
| 45m | | 7 | 45 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 31.1 | 42t | 42000 | | | | 37000 | 31900 | 28000 | | | | | | | | | |
| | | 7 | 20.8 | 63t | 63000 | 51700 | 42200 | 35500 | 30400 | 26500 | | | | | | | | | | |
| 40m | | 7 | 40 | 21t | 21000 | | | | | | | | | | | | | | | |
| | | 7 | 31.2 | 42t | 42000 | | | | 37000 | 32000 | | | | | | | | | | |
| | | 7 | 20.8 | 63t | 63000 | 51800 | 42300 | 35000 | 30500 | | | | | | | | | | | |

传动机构 Mechanisms

| 机构 Mechanisms | 图例 Example | 机构代号 Model | 速度 (m/min) Speed | 起重量 (t) Hoist Weight | 容绳量 (m) Rope Capacity | 功率 (kW) Power | |
|------------------------------------------------------------------|---------------|----------------|---------------------|------------------------------|--------------------------|------------------|-----|
| 起升 Hoisting | | 132LVF115B | | 29 | 21 | 917m > 917m* | 132 |
| | | | | 57 | 10.5 | | |
| | | | | 86 | 4 | | |
| | | | | 14.5 | 42 | | |
| | | | | 29 | 21 | | |
| | | | | 37.5 | 8 | | |
| | | | | 10 | 63 | | |
| | | | | 20 | 31.5 | | |
| | | | | 29 | 12 | | |
| 变幅 Trolleying | | 24JXF33A | 0~50 m/min | | | 24 | |
| 回转 Slewing | | 180HP403-20/13 | 0~0.6r/min | | | 3x18.5 | |
| 电源 Main supply | | | | 440V;60HZ, 3P / 380V;50HZ;3P | | | |
| 总功率 (不含顶升和行走) Gross power (excluding top-lifting and travelling) | | | | | 211.5kW | | |

